


FDB Guardian 30mA RCCB/RCBO Monitoring Protection Device

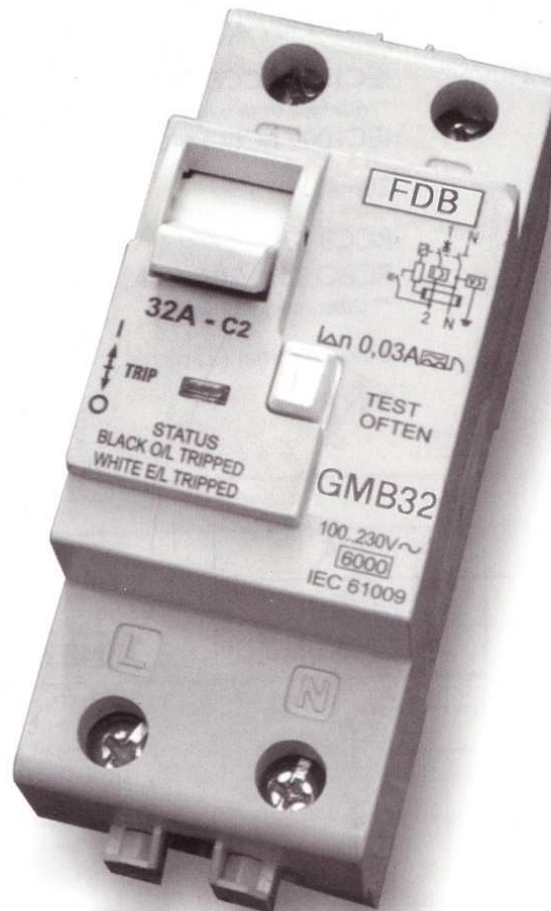

FDB Guardian Features:


- Detects and trips for lost Neutral Condition.
- Detects and trips if Phase and Neutral are reversed.
- Detects and trips Neutral to Earth Voltage exceeds 50V.
- Operates if Reverse Fed.
- Available with Overload & Without 63A max.
- Immune to Pulsating DC.
- 100V or 230V operation

SPECIFICATION

Voltage Rating : 100V-230V AC 50/60Hz
Short Circuit (kA) @240VAC : IEC1008 RCCB 6KA*
 *Withstand (with suitable short circuit device MCB/Fuse)
Sensitivity : 30mA
Current Rating : RCCB 63A
 RCBO 16A, 20A, 32A, 63A**
 **Other rating's available
Connection : Box Terminal (25mm~)
Mounting : DIN Rail

ORDER REFERENCE

Type	16A	20A	32A	63A
RCCB	-	-	-	GMS63
RCBO	GMB16	GMB20	GMB32	GMB63

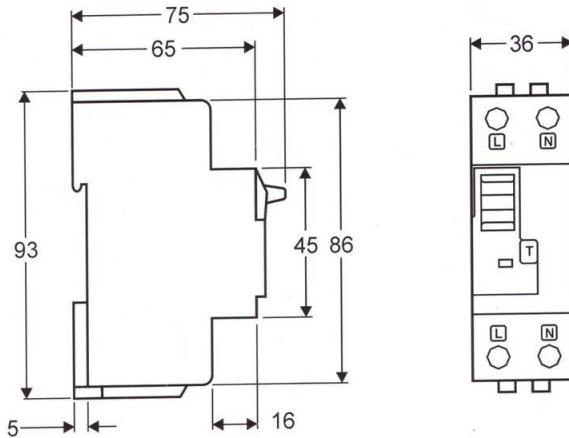

In line with our policy of constant improvements, we reserve the right to vary the specifications contained in this leaflet.

The services of our Technical support staff are available for assistance or guidance on earth leakage problems and possible solutions please contact us at:

FDB Electrical
 Unit 1 Reynard Mills Trading Estate, Windmill Road,
 Brentford, Middlesex TW8 9NZ

Telephone: +44 (0)20 8 568 4621
 Fax: +44 (0)20 8 569 7899
 Email: rcdsales@fdb.uk.com



A member of the Group owned by
Findlay Durham & Brodie Ltd
 Partnership (Est 1852)

We manufacture a complete range of electrical safety products. Please contact us for further details.